



SOCT Copernicus  
**REVO**

AS SIMPLE AS PRESSING *the start button*



**OPTOPOL**  
technology

# SOCT Copernicus **REVO** *cutting starts again*

Our supreme experience in Spectral Domain OCT technology allows us to provide you with the modern OCT that offers remarkable simplicity of operation. The new SOCT Copernicus REVO will meet the daily demands of any modern practice.

## OCT made simple as never before

Position the patient and press the START button to acquire examinations of both eyes.

The SOCT Copernicus REVO, using vocal messages, guides the patient through the process increasing comfort and reducing patient chair time.

**Creating customised scanning protocols of different diagnostic scenarios will speed up workflow.**




## A perfect fit for every practice


Small system footprint, various operator and patient positions and connection by a single cable allows the installation of SOCT Copernicus REVO into the smallest of examination room spaces. Revo's variety of examination and analysis tools enables it to effortlessly function as a screening or advanced diagnostic device.

## High quality of OCT image

The noise reduction technology provides the finest details proven to be important for early disease detection.

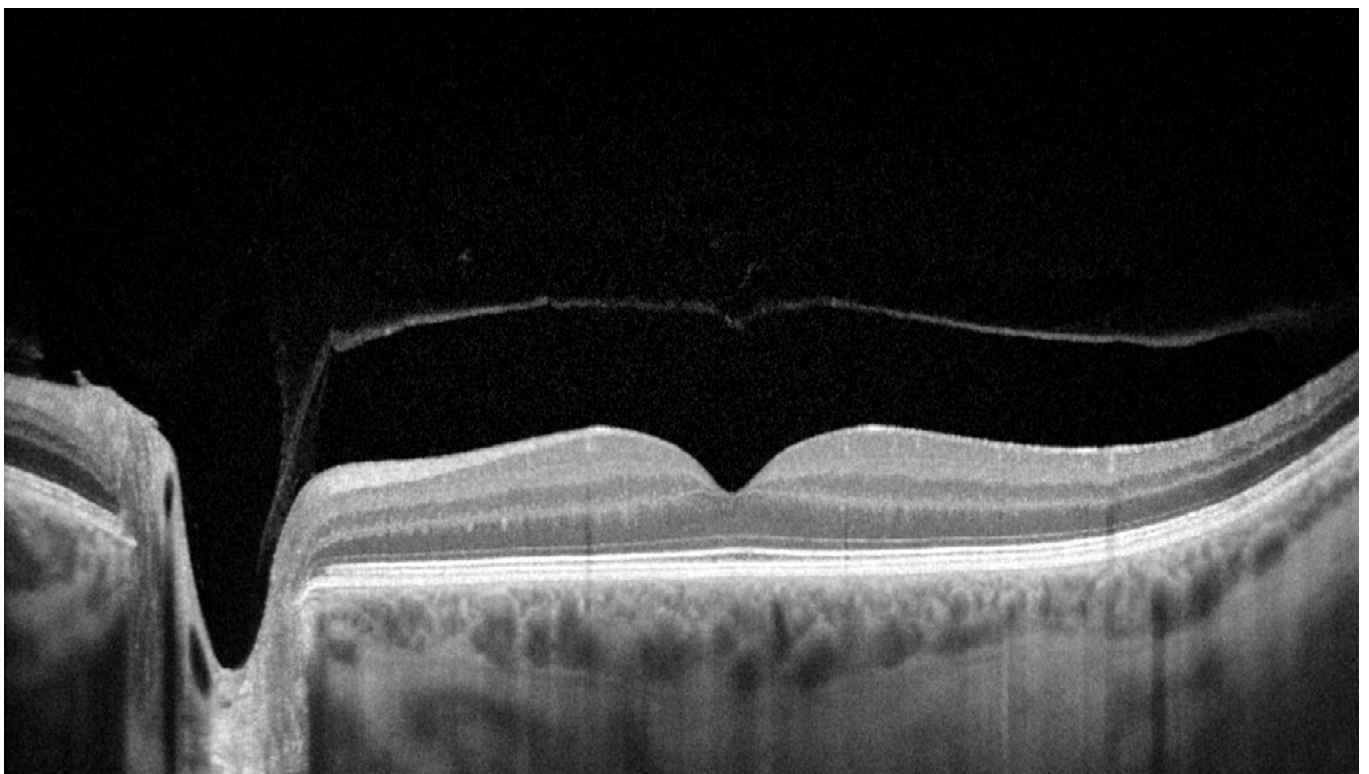

# SOCT Copernicus REVO offers all the newest standards available in Spectral OCT technology.

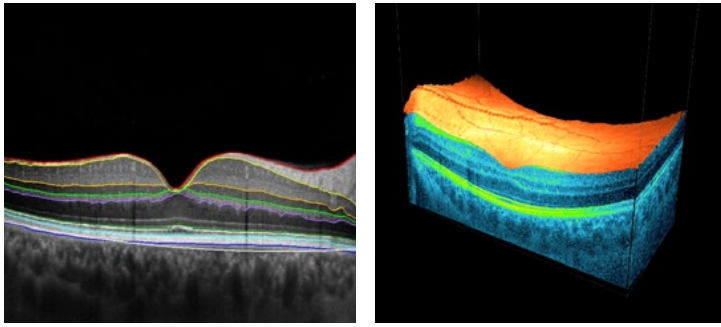

## RETINA

A single 3D macula scan performs both Retina and Glaucoma analysis.

The software automatically recognises 8 retinal layers which assists with a precise diagnosis and the mapping of any changes in the patient's condition.

## ANGIOGRAPHY SOCT<sup>2,3</sup>


This non-invasive dye free technique allows the visualization of the microvasculature of the retina. Both blood flow and structural visualization will give additional information in the diagnosis of many retinal diseases. Angiography scan allows assessment of the structural vasculature of the macula, periphery or the optic disc. Extremely short scanning time 1.6 second in standard resolution or within ~3 seconds in high resolution.

Now Angiography OCT can become a routine diagnosis in your practice.

## ANGIOGRAPHY MOSAIC<sup>2,3</sup>

The Angiography mosaic delivers high-detailed images over large field of the retina. Available modes allow to see predefined region of the retina in a convenient way.

Manual mode allows to scan desired region. Analysis tools allow to see vascular layers, enface or thickness maps.


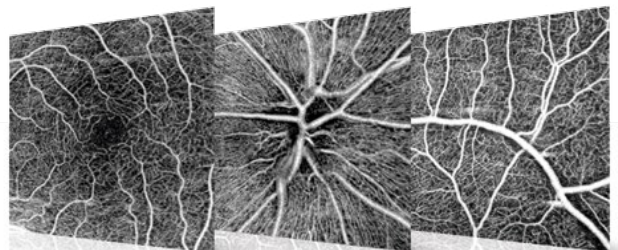


Mosaic mode: 10x6 mm




## WIDEFIELD SCAN

12x12 mm Widefield Central scan is perfect for fast and precise screening of the patient's retina.

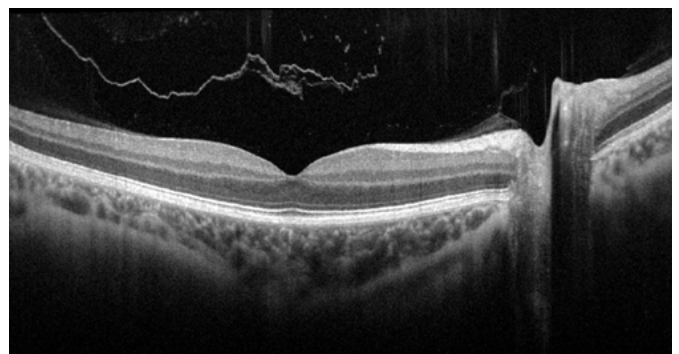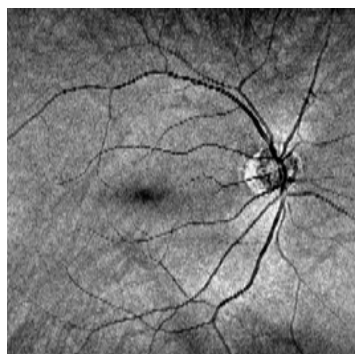


Peripheral scanning reveals diseases in the far periphery.

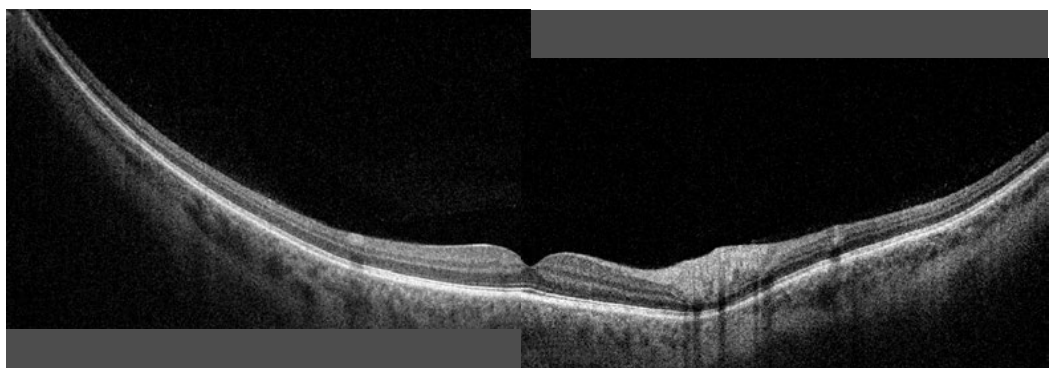

Combined view of two examinations of peripheral scan 12mm + 12 mm. Done in external software.




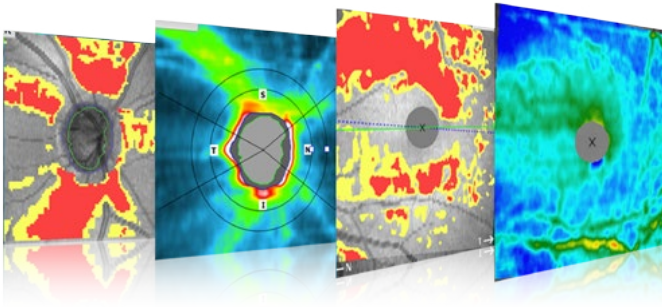

## GLAUCOMA

Comprehensive glaucoma analysis tools for quantification of Nerve Fiber Layer, Ganglion layer Optic Nerve Head with DDLS allows for precise diagnosis and the monitoring of glaucoma over time.

Asymmetry Analysis of Ganglion layers between hemispheres and between eyes allow the identification and detection of glaucoma in its early stages and in non-typical patients.

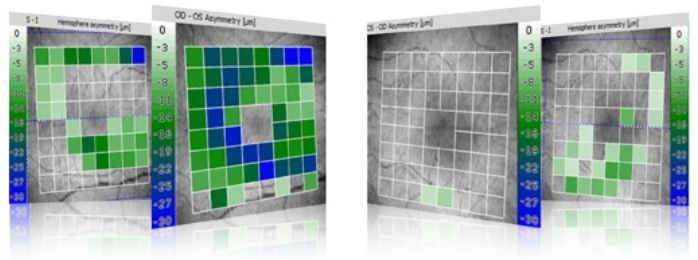


## FOLLOW UP


Revo's standard high density scanning capability and blood vessel structure recognition enable a precise alignment of past and current scans

Operator can analyze changes in morphology, quantified progression maps and evaluate the progression trends

Progression Morphology

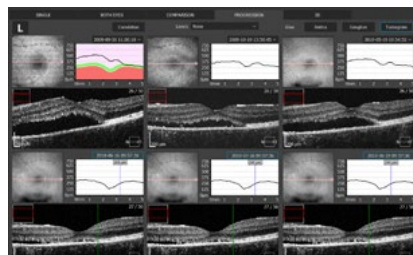



Progression Quantification

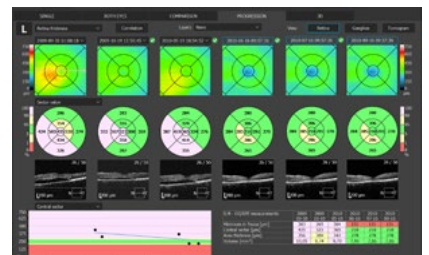


## ANTERIOR

For a standard anterior examination, no additional lens is required. This allows the examiner to quickly complete the scanning procedure.

Additional adapter provided with the device increases range of clinical application in Anterior chamber observation.

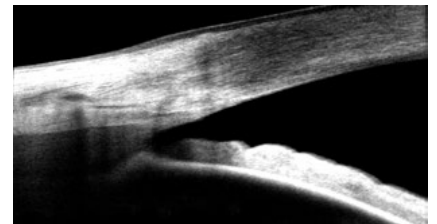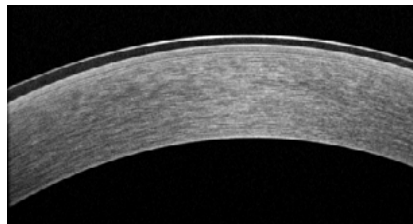


Angle to Angle scan

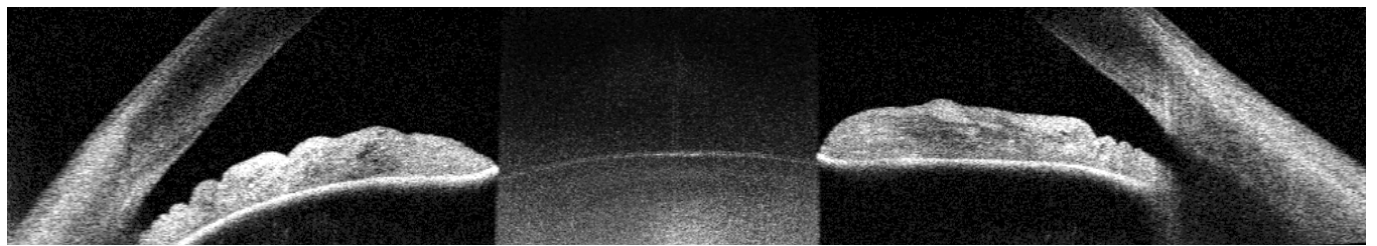


## BIOMETRY OCT<sup>3</sup>

B-OCT<sup>®</sup> Innovative method of using the posterior OCT device to measure ocular structure along eye axis. OCT Biometry provides complete set of Biometry parameters: Axial Length AL, Central Cornea Thickness CCT, Anterior Chamber Depth ACD, Lens Thickness LT.

Single view

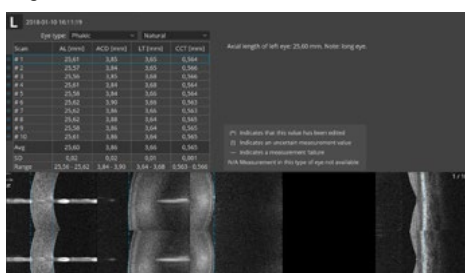


Result review

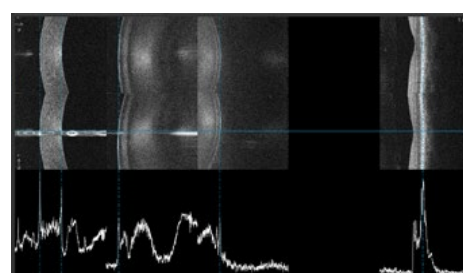


## VISUALLY VERIFY YOUR MEASUREMENT

All measurement calipers are shown on all boundaries of OCT image provided by REVO. Now, you can visually verify, identify and if needed correct which structure of the eye has been measured.


Choroidal observation

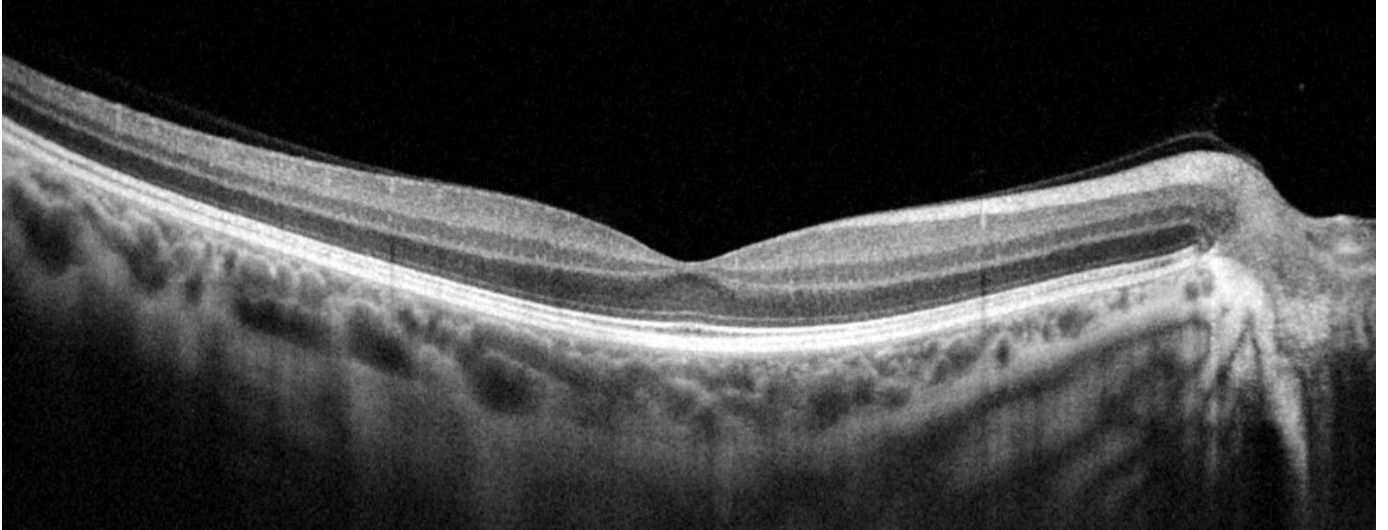


Wide Central scan

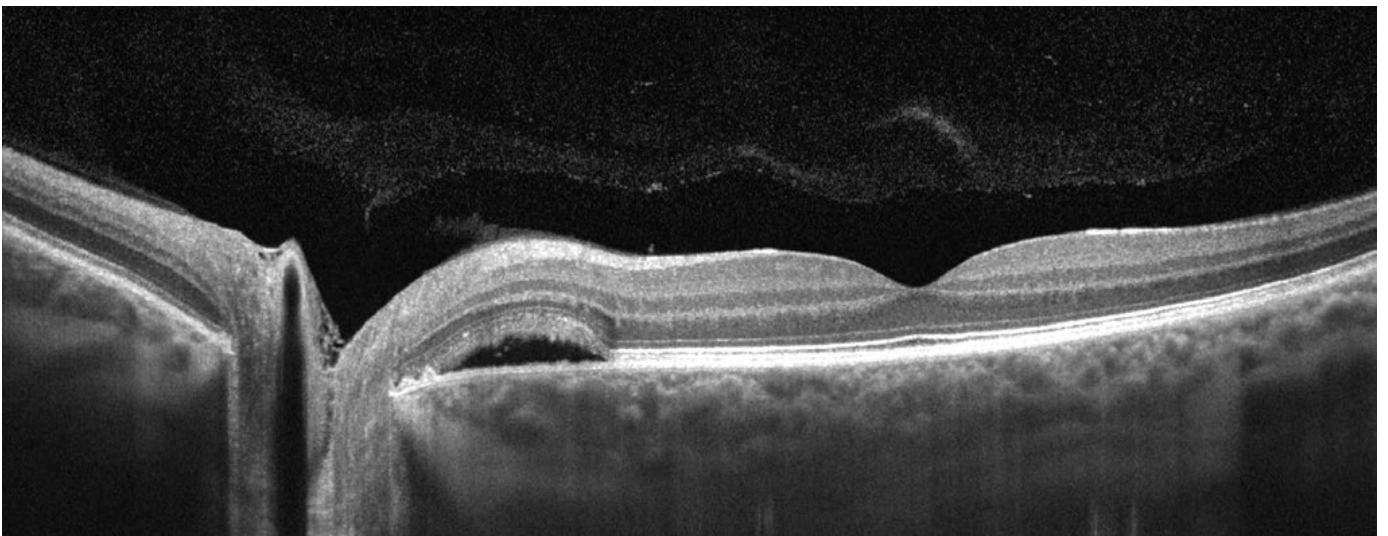

Sclera and Anterior Structure

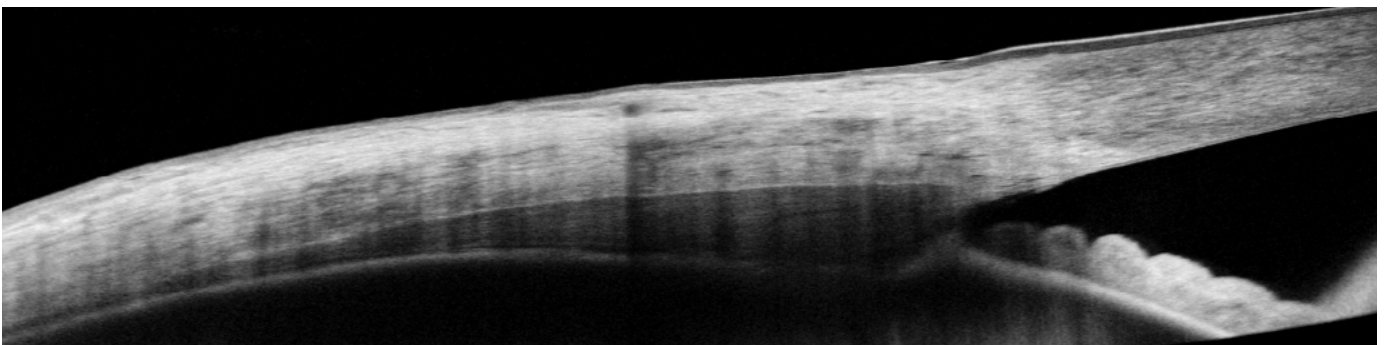

Cornea wide scan

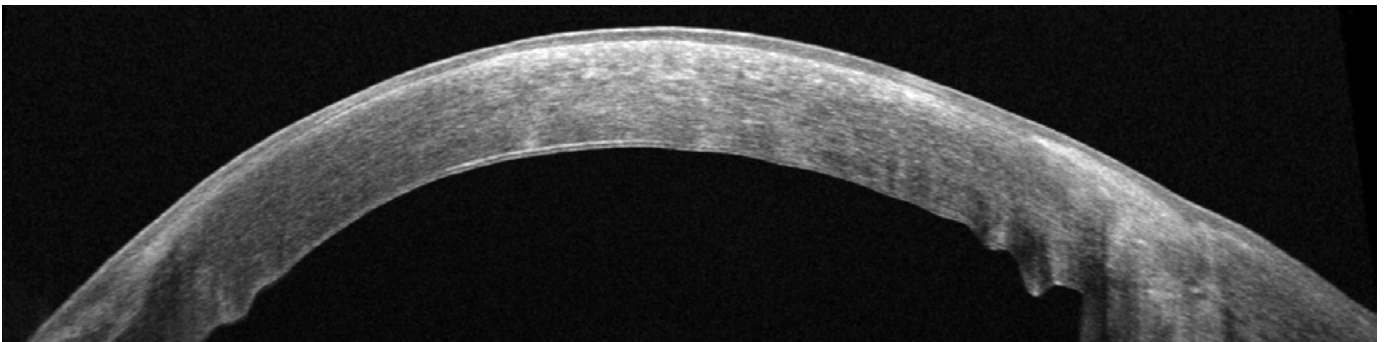



Technology	Spectral Domain OCT
Light source	SLED, wavelength 830 nm
Bandwidth	50 nm half bandwidth
Scanning speed	80 000 <sup>1</sup> / 27 000 measurements per second
Axial resolution	5 µm in tissue 2.6 µm digital
Transverse resolution	12 µm, typical 18 µm
Overall scan depth	2.4 mm
Minimum pupil size	3 mm
Focus adjustment range	-25 D to +25 D
Scan range	Posterior 5–12 mm, Angio <sup>2,3</sup> 3–6 mm, Anterior 3–16 mm
Scan types	3D, Angio <sup>2,3</sup> , Radial, B-scan, Raster, Cross
Fundus image	Live Fundus Reconstruction
Alignment method	Fully automatic, Automatic
Retina analysis	Retina thickness, Inner Retinal thickness, Outer Retinal thickness, RNFL+GCL+IPL thickness, GCL+IPL thickness, RNFL thickness, RPE deformation, IS/OS thickness
Angiography OCT <sup>2,3</sup>	Superficial Plexus, Deep Plexus, Outer Retina, Choriocapillaries, Choroid, Depth Coded, Custom, Enface, Thickness map
Angiography mosaic	Acquisition method: Auto, Manual Mosaic modes: 10×6 mm, Manual up to 12 images
Glaucoma analysis	RNFL, ONH morphology, DDLS, Ganglion analysis as RNFL+GCL+IP and GCL+IPL, OU and Hemisphere asymmetry
Biometry OCT <sup>3</sup>	AL, CCT, ACD, LT
Anterior	Pachymetry map, Epithelium map, LASIK Flap assesment, Angle Assessment, AIOP, AOD 500/750, TISA 500/750
Anterior Wide Scan	Angle to Angle view (Adapter required)
Connectivity	DICOM Storage SCU, DICOM MWL SCU, CMDL, Networking
Dimensions (W×D×H)	382×556×469 mm
Weight	23 kg
Fixation target	OLED display (the target shape and position can be changed), external fixation arm
Power supply	100–240 V, 50/60 Hz
Power consumption	115–140 VA

<sup>1</sup> scanning speed is optional hardware feature and has to be selected when ordering

<sup>2</sup> only for SOCT Copernicus REVO with scanning speed 80 000 measurements per second

<sup>3</sup> optional software module to purchase